

SL-NTS24CV100W-CA


24V DC power supply 100 Watt



PRODUCT FEATURES


- » 24 Volt DC power supply unit with 2 meter connection cable
- » Direct connection of up to 8 x 24V DC Led lights or Siro Receiver.
- » 100 watts, maximum output power (max. 3A per connection)
- » Connection of wired sensors (TOUCH, PIR, DOOR) to control the power supply output
- » 4-pin sensor connection for sensors from common manufacturers
- » **Wired sensors must not be used together with connected SIRO receivers (at the power supply unit output)!**
- » Short-circuit protection & overload protection
- » Low stand-by consumption < 0.21 watts

TECHNICAL DRAWING

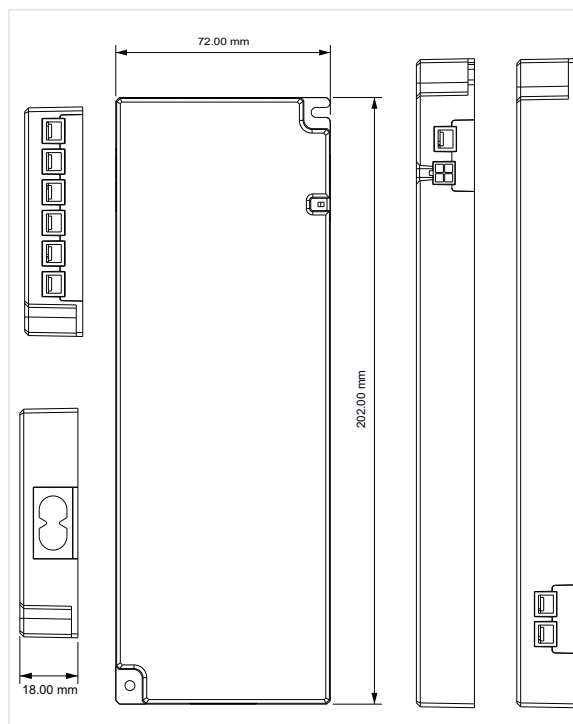

TECHNICAL DATA

- » Input voltage:..... 200 - 240V AC
- » Output voltage: 24V DC
- » Output current: 4,16 A
- » Power: 100 Watt
(10% reserve recommended)
- » Efficiency: 92%
- » Standby P: 0.21 W
- » Idle power P_{no}:..... N/A
- » Networked standby power P_{net}:..... N/A
- » Protection class:..... IP 20
- » Mains frequency input:..... 50 - 60 Hz
- » Housing color: white
- » Ambient temperature:..... -20° - +45°C
- » Protection: Short-circuit &
Overload protection
- » Length:..... 201,30 mm
- » Width:..... 71,20 mm
- » Height:..... 18,00 mm
- » Weight:..... 296 g

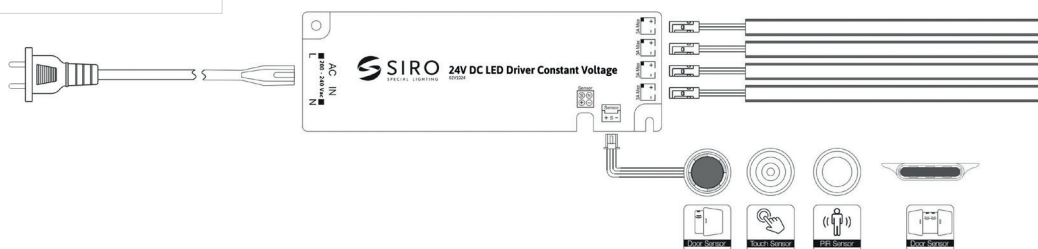

RoHS

Darf nicht in den Hausmüll entsorgt werden.
Must not be disposed of in household waste.

SIRO Beschläge- und
Metallwarenfabrik
Spielfeldstraße 12
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932
E-Mail office@siro.at
Web . www.siro.at

© 2021 Alle Rechte
vorbehalten.