

## SL-NTS24CV60W-CA


24V DC Power Supply with 60 Watt



### PRODUCT FEATURES


- » 24 Volt DC power supply unit with 2 meter connection cable
- » Direct connection of up to 5 x 24V DC Led lights or Siro Receiver.
- » 60 watts, maximum output power (max. 3A per connection)
- » Connection of wired sensors (TOUCH, PIR, DOOR) to control the power supply output
- » 4-pin sensor connection for sensors from common manufacturers
- » **Wired sensors must not be used together with connected SIRO receivers (at the power supply unit output)!**
- » Short-circuit protection & overload protection
- » Low stand-by consumption < 0.23 watts

### TECHNICAL DRAWING

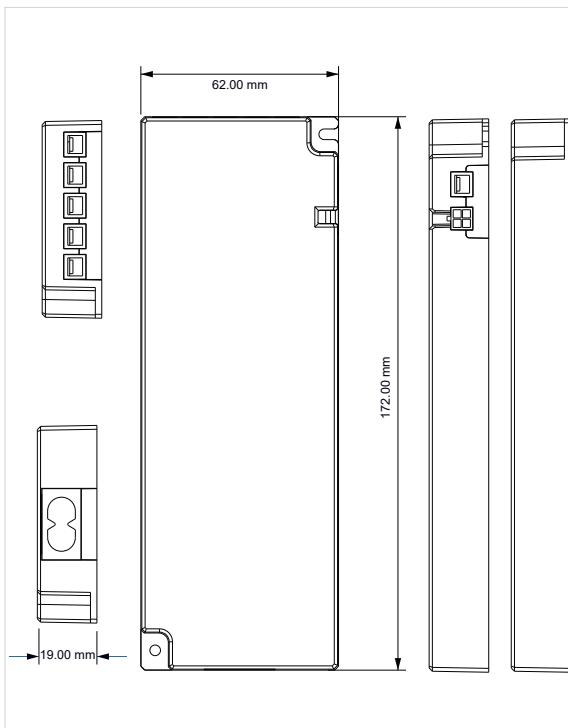

### TECHNICAL DATA

- » Input voltage: ..... 200 - 240V AC
- » Output voltage: ..... 24V DC
- » Output current: ..... 2.5 A
- » Power: ..... 60 Watt  
(10% reserve recommended)
- » Efficiency: ..... 89%
- » Standby P: ..... 0.23 W
- » Idle power P\_no.: ..... N/A
- » Networked standby power P\_net: ..... N/A
- » Protection class: ..... IP 20
- » Mains frequency input: ..... 50 - 60 Hz
- » Housing color: ..... white
- » Ambient temperature: ..... -20° - +45°C
- » Protection: ..... Short-circuit & Overload protection
- » Length: ..... 172.00 mm
- » Width: ..... 62.00 mm
- » Height: ..... 19.00 mm
- » Weight: ..... 246 g

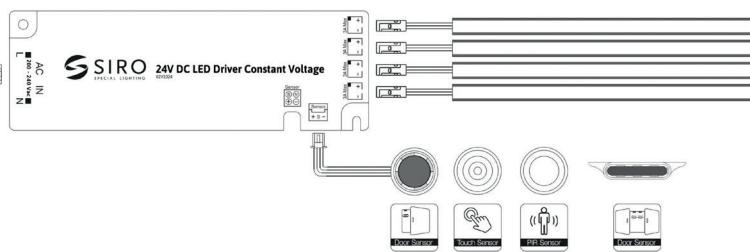

Darf nicht in den Hausmüll entsorgt werden.  
Must not be disposed of in household waste.

SIRO Beschläge- und  
Metallwarenfabrik  
Spielfeldstraße 12  
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.  
Fax . +43 (0)7256.8932  
E-Mail office@siro.at  
Web . www.siro.at

© 2021 Alle Rechte  
vorbehalten.